


DYNAMIC APPLICATION

FRX® PLUS

POWER&CONTROL MULTICORE

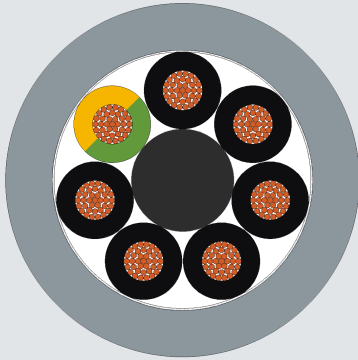

APPLICATIVE FEATURES



**UP TO 5 MILLION
GUARANTEED CYCLES**



**10,0 M/S²
ACCELERATION**



**20,0 M
CABLE LENGTH**



**180,0 M/MIN
TRAVEL SPEED**



MINIMUM BENDING RADIUS

CROSS SECTION	CROSS SECTION MAX	DYNAMIC INSTALLATION	STATIC INSTALLATION
0.50	16.00	7.5xØ	4.0xØ
25.00	50.00	10.0xØ	5.0xØ

APPROVALS



**AWM STYLE 21179
90°C 1000V**



**AWM I/II A/B 90°C
1000V**



2014/35/CEE



2011/65/UE



1907/2006

TECHNICAL DATA



DYNAMIC
-5°C +90°C
STATIC
-40°C +90°C
OCCASIONAL FLEXING
-20°C +90°C



NOMINAL VOLTAGE
1000 V (UL/CSA)
U₀/U 0,6/1 KV (VDE)



TEST VOLTAGE
4,0 KV
TEST VOLTAGE REFERENCE
EN 50395 PART 6-7 - UL/1581



INSULATION RESISTANCE
>1 GOHM/KM ACC. TO EN 50395
PRT.8

CONSTRUCTION FEATURES

POWER CONDUCTORS

CONDUCTOR

**CL6 EXTRA-FLEXIBLE.
BARE COPPER.**

INSULATION

POLYPROPYLENE COMPOUND (PP)

INSULATION COLOR

**BLACK CORE WITH WHITE PRINTED NUMBER + GREEN
YELLOW**

FILLER

**FILLER
POLYPROPYLENE**

SEPARATION LAYER

**TAPE
NON-WOVEN TAPE**

OVERALL STRANDING

FILLER

**FILLER
POLYPROPYLENE**

SEPARATION LAYER

**TAPE
NON-WOVEN TAPE**

SHEATH

PVC COMPOUND.

SHEATH COLOUR

GRAY, RAL: 7001, DESINA: NO

PRODUCTS FEATURES



FIRE PERFORMANCE

DIN VDE 0482-332-1-2
DIN EN 60332-1-2
IEC 6033-1-2
UL CABLE FLAME
UL VW-1
CSA FT1



OIL PERFORMANCE

VDE 0473-811-404
IEC 60811-404 (EU)
CEI EN 50363-4-1 (EU)
1581 (UL)



UV PERFORMANCE

CEI EN 50289-4-17
ISO 4892-2
ASTM-D-2565-16



WATER PERFORMANCE

UL 1581
IEC 60811



HYDROCARBONS PERFORMANCE

UL 1581

TECO CODE	FORMATION	CUT	ROLLS [M]	DRUMS [M]	EXT Ø [MM]	WEIGHT [KG/KM]	INS. COLOUR EXC	SHEATH COLOUR EXC
46439	2X0,50 2XAWG21	✗	100	500	5.2	40	BLACK CORE WITH WHITE PRINTED NUMBERS.	
46378	2X1,00 2XAWG18	✗	100	500	6	55	BLACK CORE WITH WHITE PRINTED NUMBERS.	
46346	3G0,50 3GAWG21	✓	100	500	5.5	58		
46373	3G0,75 3GAWG19	✓	100	500	6.2	60		
46440	3G1,00 3GAWG18	✗	100		6.3	65		
46391	3G1,50 3GAWG16	✓	100	500	7.2	85		
46399	3G2,50 3GAWG14	✓	100	500	8.4	140		
46405	3G4,00 3GAWG12	✓		500	10.2	220		
46347	4G0,50 4GAWG21	✓	100	500	6.2	60		
46372	4X0,50 4XAWG21	✗	100	500	6.2	60	BLACK CORE WITH WHITE PRINTED NUMBERS.	
46382	4G1,00 4GAWG18	✓	100	500	6.8	85		
46398	4G1,50 4GAWG16	✓	100	500	7.8	110		
46400	4G2,50 4GAWG14	✓		500	9.2	180		
46406	4G4,00 4GAWG12	✓		500	11.2	250		
46407	4G6,00 4GAWG10	✓			13.4	360		
46409	4G10,00 4GAWG08	✓			17	610		
46411	4G16,00 4GAWG06	✓			22	980		
46374	5G0,75 5GAWG19	✓	100	500	7.3	85		
46383	5G1,00 5GAWG18	✓	100	500	7.7	95		
46392	5G1,50 5GAWG16	✓	100		8.6	140		
46401	5G2,50 5GAWG14	✓		500	10.6	220		
46408	5G6,00 5GAWG10	✓			15	450		
46410	5G10,00 5GAWG08	✓			19	870		
46348	7G0,50 7GAWG21	✓	100	500	7.6	85		
46375	7G0,75 7GAWG19	✓	100	500	8.6	125		
46384	7G1,00 7GAWG18	✓	100	500	9.2	150		
46393	7G1,50 7GAWG16	✓		500	10	215		
46402	7G2,50 7GAWG14	✓		500	12.4	290		
46349	12G0,50 12GAWG21	✓		500	9.6	130		
46376	12G0,75 12GAWG19	✓		500	10.2	180		
46385	12G1,00 12GAWG18	✓		500	10.8	200		
46386	12X1,00 12XAWG18	✓		500	10.8	200	BLACK CORE WITH WHITE PRINTED NUMBERS.	
46394	12G1,50 12GAWG16	✓		500	12.4	290		

TECO CODE	FORMATION	CUT	ROLLS [M]	DRUMS [M]	EXT Ø [MM]	WEIGHT [KG/KM]	INS. COLOUR EXC	SHEATH COLOUR EXC
46403	12G2,50 12GAWG14	✓			15	450		
46350	18G0,50 18GAWG21	✓		500	10.8	190		
46377	18G0,75 18GAWG19	✓		500	11.9	245		
46387	18G1,00 18GAWG18	✓		500/100	12.9	260		
46395	18G1,50 18GAWG16	✓			15.4	415		
46351	25G0,50 25GAWG21	✓		500/100	13.2	280		
46388	25G1,00 25XAWG18	✓		500	15.2	460		
46396	25G1,50 25GAWG16	✓			19	590		
46404	25G2,50 25GAWG14	✓			22	900		
46352	33G0,50 33GAWG21	✓			14.2	320		
46389	34G1,00 34GAWG18	✓			17.5	540		
46390	50G1,00 50GAWG18	✓			21.2	880		

TE.CO. reserves the right to make changes to any of the products without, however, affecting the essential technical features. Unless specified otherwise, all the product ratings stated are nominal ratings. The RAL colour code is provided for illustrative purposes only.
Company managed and coordinated by Fangen S.r.l.. All rights reserved. No reproduction permitted without written permission from TE.CO. Tecnologia Commerciale S.p.A.