


# STATIC APPLICATION

## TC-ER POWER&CONTROL MULTICORE NYLON



### APPLICATIVE FEATURES

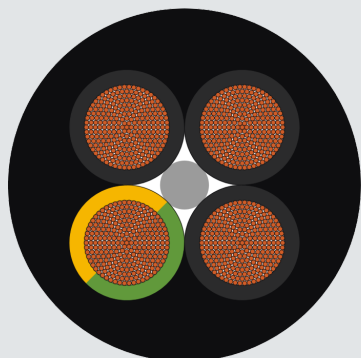

#### MINIMUM BENDING RADIUS

CROSS SECTION	CROSS SECTION MAX	DYNAMIC INSTALLATION	STATIC INSTALLATION
1.00	70.00	15xø (occasional flexing)	6.0xø

### APPROVALS



TC-ER 90°C 600V



MTW 90°C 600V



WTTC 90°C 1000V



AWM STYLE 20886  
90°C 1000V



CSA CIC-TC-ER 90°C  
600V



2014/35/CEE



2011/65/UE



1907/2006

### TECHNICAL DATA



STATIC  
-40°C +90°C  
OCCASIONAL FLEXING  
-5°C +90°C



NOMINAL VOLTAGE  
1000V (UL AWM)  
600V (UL MTW)  
1000V (UL WTTC)  
0,6/1KV (IEC/VDE)



TEST VOLTAGE  
2000V\*  
3000V\*\*  
TEST VOLTAGE REFERENCE  
\*ACC. TO 1277 TAB. 14.1  
\*\*ACC. TO UL 758 TAB 29.1



INSULATION RESISTANCE  
>= 200 MOHM/KM

### CONSTRUCTION FEATURES

POWER CONDUCTORS	CONDUCTOR	CL5 FLEXIBLE. BARE COPPER.
	INSULATION	PVC COMPOUND.
	INSULATION COLOR	BLACK CORE WITH WHITE PRINTED NUMBER + GREEN YELLOW
	FILLER	FILLER POLYPROPYLENE
OVERALL STRANDING	TALC	TALC POWDER
	SHEATH	PVC COMPOUND.
	SHEATH COLOUR	MATTE BLACK, RAL: 9005, DESINA: NO

### PRODUCTS FEATURES



**FIRE PERFORMANCE**  
UL 1581 SECTION 1160 (UL VERTICAL-  
TRAY FLAME TEST)  
CSA FT4  
FT1  
FT2  
UL 1581 VW-1 / CABLE FLAME TEST  
UL 1685 - FT4/IEEE 1202 VERTICAL  
FLAME TEST  
IEC 60332-1-2



**OIL PERFORMANCE**  
OIL RESISTANCE I



**UV PERFORMANCE**  
SUN RESISTANT (UL)



**WATER PERFORMANCE**  
UL 90° DRY  
UL 75°C WET (FOR SECTION >  
1.5MM<sup>2</sup>)



**MUD PERFORMANCE**  
DIRECT BURIAL (FOR SECTION >  
1.5MM<sup>2</sup>)  
EXPOSED RUN FOR UL1277

TECO CODE	FORMATION	CUT	ROLLS [M]	DRUMS [M]	EXT Ø [MM]	WEIGHT [KG/KM]
46708	2X1,00 2XAWG18	✓	100	500	6.9	82
46709	3G1,00 3GAWG18	✓	100	500	7.3	86
46714	3G1,50 3GAWG16	✓	100	500	7.9	105
46718	3G2,50 3GAWG14	✓	100	500	8.8	150
46710	4G1,00 4GAWG18	✓	100	500	7.9	100
46715	4G1,50 4GAWG16	✓	100	500	8.6	125
46719	4G2,50 4GAWG14	✓	100/200	500	9.5	175
46721	4G4,00 4GAWG12	✓	100/200	500	11	250
46711	5G1,00 5GAWG18	✓	100	500	8.5	120
46716	5G1,50 5GAWG16	✓	100	500	9.4	153
46720	5G2,50 5GAWG14	✓		500	10.5	215
46712	7G1,00 7GAWG18	✓	100	500	9.2	150
46717	7G1,50 7GAWG16	✓	100/200	500	10.2	190
46713	12G1,00 12GAWG18	✓		500	12	240

TE.CO. reserves the right to make changes to any of the products without, however, affecting the essential technical features. Unless specified otherwise, all the product ratings stated are nominal ratings. The RAL colour code is provided for illustrative purposes only.  
Company managed and coordinated by Fangen S.r.l.. All rights reserved. No reproduction permitted without written permission from TE.CO. Tecnologia Commerciale S.p.A.